



# Compatibility Matrix

Control Panels | Hardware | Software

# Contents

## Overview

## Control Panels

- Discovery
- ChallengerPlus
- Challenger10
- ChallengerLEPlus

## Access Controllers

- NAC
- NAC with Wiegand
- Intelligent 4DC/4LC

## Peripherals

## Enclosures

## Software

- CTPlus
- WMS Pro
- TecomC4
- Forcefield



# Overview

This document contains information specific to the software and firmware versions listed below. It may not be accurate for earlier or later versions. For the most up-to-date software and firmware, click [here](#) to visit the Aritech website.

## Latest Firmware Support

| Product                                                | Version        | Upgradeable |
|--------------------------------------------------------|----------------|-------------|
| Hardware                                               |                |             |
| Discovery Control Panel (TSX10000)                     | TSX-2-85301    | ✓           |
| Discovery I/O Module                                   | Coming Soon    | ✓           |
| ChallengerPlus (TS-CHPLUS)                             | V10-07.85553   | ✓           |
| Challenger10 (TS1016)                                  | V10-06.68905   | ✓           |
| ChallengerLEPlus (TS1016LEPLUS)                        | V10-07.69389   | ✓           |
| Network Access Controller (TS1066)                     | V10-01.85473   | ✓           |
| Network Access Controller w/ onboard Wiegand (TS1067E) | V11-03.85473   | ✓           |
| Dual Wiegand Interface (TS1061)                        | V01-02.68243   | ✓           |
| Challenger10 Memory Module (TS1084)                    | V01-02.57932   | ✓           |
| 4G Communication Module (TS1054)                       | V01-02.81051   | ✓           |
| Challenger10 DGP (TS1020)                              | V01-02.80230   | ✓           |
| Touchscreen RAS Firmware (TS1001)                      | V01-00.18703   | ✓           |
| Touchscreen RAS GUI (TS1001)                           | Carrier-180821 | ✓           |
| IP LAN Adaptor (TS0098)                                | V1-1-3893      | Limited     |
| Intelligent 4 Door Controller (TS0866 / TS0867)        | R121818        | Limited     |
| Intelligent 4 Lift Controller (TS0869)                 | L121818        | Limited     |
| RS485 to Fibre Interface (TS0896)                      | 2050-003       |             |
| Software                                               |                |             |
| WMS Pro                                                | 3.3            | ✓           |
| CTPlus                                                 | 3.7            | ✓           |
| Forcefield                                             | 8.1.0          | ✓           |
| TecomC4                                                | 2023 SP1       | ✓           |
| TecomPlus Mobile App (iOS)                             | 2.0.13         | ✓           |
| TecomPlus Mobile App (Android)                         | 2.0.13         | ✓           |
| WMS                                                    | 2.6            | ✓           |
| IP Receiver                                            | 2.6            | ✓           |

# Control Panels

|                          | Discovery     | ChallengerPlus              | ChallengerLEPlus               |
|--------------------------|---------------|-----------------------------|--------------------------------|
|                          | TSX10000      | TS-CHPLUS                   | TS1016LEPLUS                   |
| <b>Inputs</b>            | <b>1,008</b>  | <b>1,008</b>                | <b>40 physical + 8 logical</b> |
| - Onboard                | 16            | 16                          | 8                              |
| <b>Relays</b>            | <b>512</b>    | <b>512</b>                  | <b>32</b>                      |
| - Onboard                | 4             |                             |                                |
| Areas                    | 99            | 99                          | 16                             |
| Area Groups              | 255           | 255                         | 32                             |
| Alarm Groups             | 255           | 255                         | 42                             |
| Door Groups              | 255           | 255                         | 32                             |
| Floor Groups             | 128           | 128                         | 16                             |
| Timezones                | 46            | 46                          | 24                             |
| Soft timezones           | 16            | 16                          | 16                             |
| Holidays                 | 24            | 24                          | 24                             |
| Holiday types            | 8             | 8                           | 8                              |
| <b>Users</b>             | <b>65,535</b> | <b>65,535 (with TS1084)</b> | <b>100</b>                     |
| - Onboard, with names    | 65,535        | 2,000                       | 100                            |
| - Card data bit length   | 48 bits       | 48 bits                     | 48 bits                        |
| <b>Doors</b>             | <b>128</b>    | <b>128</b>                  | <b>16</b>                      |
| - Standard Doors         | 32            | 32                          | 8                              |
| - Controller Doors       | 96            | 96                          |                                |
| <b>Lifts</b>             | <b>98</b>     | <b>98</b>                   | <b>1</b>                       |
| - Standard Lifts         | 2             | 2                           | 1                              |
| - Controller Lifts       | 96            | 96                          |                                |
| <b>Readers</b>           | <b>416</b>    | <b>416</b>                  | <b>18</b>                      |
| - Onboard                | 2             | 1                           | 1                              |
| - Per Standard Door      | 1             | 1                           | 1                              |
| - Per Controller Door    | 4             | 4                           |                                |
| - Per Standard Lift      | 2             | 2                           | 2                              |
| - Per Controller Lift    | 4             | 4                           |                                |
| <b>Floors</b>            | <b>64</b>     | <b>64</b>                   | <b>10</b>                      |
| - Standard Lift Floors   | 10 (per Lift) | 10 (per Lift)               | 10 (total)                     |
| - Controller Lift Floors | 64            | 64                          |                                |
| RS-485 LANs              | 3             | 2                           | 1                              |
| DGPs                     | 31            | 31                          | 1                              |
| RASs                     | 32            | 32                          | 16                             |
| RAS area-LED mapping     | ✓             | ✓                           | ✓                              |
| Input shunt timers       | 32            | 32                          | 16                             |
| Macro logic programs     | 48            | 48                          | 16                             |
| Event flags              | 255           | 255                         | 100                            |
| Financial options        | ✓             | ✓                           |                                |
| Vault programming        | ✓             | ✓                           |                                |
| Total disarm areas       | ✓             | ✓                           |                                |
| Area search mode         | ✓             | ✓                           |                                |
| Alarm history events     | 5,000         | 5,000                       | 500                            |
| Access history events    | 5,000         | 5,000                       | 500                            |
| Event Log History        | 10,000        | 10,000                      | 1,000                          |
| Automation zones         | 100           | 100                         | 20                             |
| Communication Paths      | 10            | 10                          | 10                             |
| UltraSync support        | ✓             | ✓                           | ✓                              |
| Ethernet                 | ✓             | ✓                           | ✓                              |
| USB Device               | ✓             | ✓                           | ✓                              |
| SD card backup/restore   |               | ✓                           |                                |
| Dialler                  |               | ✓                           |                                |
| Web-based programming    | ✓             |                             |                                |

# Access Controllers

|                        | Network Access Controller (NAC) |        | NAC with Wiegand | Intelligent 4 Door/Lift Controller |        |        |
|------------------------|---------------------------------|--------|------------------|------------------------------------|--------|--------|
|                        | TS1066-4                        | TS1066 | TS1067           | TS0866                             | TS0867 | TS0869 |
| Inputs                 | 1,000                           |        | 1,024            | 80                                 |        |        |
| - Onboard              | 8                               |        | 16               | 8                                  | 16     | 16     |
| Relays                 | 512                             |        | 512              | 64                                 |        |        |
| - Onboard              | 4                               |        | 5                | 4                                  |        |        |
| Doors / Lifts          | 4                               | 8      | 8                | 4                                  |        |        |
| - Default              | 4                               | 8      | 4                | 4                                  |        |        |
| Readers                | 24                              | 48     | 48               | 16                                 |        |        |
| - Per Door / Lift      | 6                               |        | 6                | 4                                  |        |        |
| - Onboard Wiegand      | None                            |        | 4                | None                               | 4      | 4      |
| Floors                 | 100                             |        | 100              | 64                                 |        |        |
| Users                  | 250,000                         |        | 250,000          | 65,535 (with TS0884)               |        |        |
| - Default              | 250,000                         |        | 2,000            | 2,000                              |        |        |
| - Card data bit length | 128 bits                        |        | 128 bits         | 48 bits                            |        |        |
| Door Groups            | 10,000                          |        | 10,000           | 255                                |        |        |
| Floor Groups           | 1,000                           |        | 1,000            | 128                                |        |        |
| Alarm Control Levels   | 100                             |        | 100              |                                    |        |        |
| Timezones              | 2,000                           |        | 2,000            | 46                                 |        |        |
| Holidays               | 100                             |        | 100              | 24                                 |        |        |
| Holiday types          | 8                               |        | 8                | 8                                  |        |        |
| RS-485 LANs            | 2                               |        | 2                | 1                                  |        |        |
| DGPs                   | 31                              |        | 31               | 15                                 |        |        |
| RASs                   | 32                              |        | 32               | 16                                 |        |        |
| OSDP Devices           | 32                              |        | 32               |                                    |        |        |
| Scheduled Actions      | 100                             |        | 100              |                                    |        |        |
| Alarm history events   | 50,000                          |        | 50,000           | 5,000                              |        |        |
| Access history events  | 50,000                          |        | 50,000           | 5,000                              |        |        |
| Event Log History      | 100,000                         |        | 100,000          | 10,000                             |        |        |
| Communication Paths    | 10                              |        | 10               |                                    |        |        |
| USB                    | ✓                               |        | ✓                |                                    |        |        |
| Ethernet               | ✓                               |        | ✓                |                                    |        |        |
| Supported Head-ends    |                                 |        |                  |                                    |        |        |
| - Direct to Software   | ✓                               |        | ✓                |                                    |        |        |
| - Discovery            | ✓                               |        | ✓                |                                    |        |        |
| - ChallengerPlus       | ✓                               |        | ✓                | ✓                                  |        |        |
| - Challenger10         |                                 |        |                  | ✓                                  |        |        |

# Peripherals

|                                                        | Discovery | ChallengerPlus | ChallengerLEPlus | NAC              |
|--------------------------------------------------------|-----------|----------------|------------------|------------------|
|                                                        | TSX10000  | TS-CHPLUS      | TS1016LEPLUS     | TS1066 / TS1067E |
| Communication Devices                                  |           |                |                  |                  |
| TSX16000 - Discovery 4G Comms Module                   | ✓         |                |                  |                  |
| TSX17000 - Discovery USB Wi-Fi Adapter                 | ✓         |                |                  |                  |
| TS0098 - IP LAN Adaptor                                | ✓         | ✓              | ✓                | ✓                |
| TS1054 - 4G Communication Module                       |           | ✓              | ✓                |                  |
| TS0840 - 4 way relay                                   | ✓         | ✓              | ✓                | ✓                |
| TS0841 / TS1041 - 8 way relay                          | ✓         | ✓              | ✓                | ✓                |
| TS0842 - 16 way open connector                         | ✓         | ✓              | ✓                | ✓                |
| TS0893 - LAN Isolation interface                       | ✓         | ✓              | ✓                | ✓                |
| TS0896 - RS485 to Fibre Interface                      | ✓         | ✓              | ✓                | ✓                |
| Data Gathering Panels (DGPs)                           |           |                |                  |                  |
| TS1020 - Challenger10 DGP                              | ✓         | ✓              | ✓                | ✓                |
| TS0820 - Challenger V8 DGP                             | ✓         | ✓              | ✓                | ✓                |
| TS0825E - Wireless DGP                                 | ✓         | ✓              |                  |                  |
| TS0824 - Challenger V8 DGP, DC                         | ✓         | ✓              |                  |                  |
| TS0827 - Challenger V8 4-input                         | ✓         | ✓              |                  | ✓                |
| TS1061 - Dual Wiegand Interface                        | ✓         | ✓              | ✓                | ✓                |
| Access Controllers                                     |           |                |                  |                  |
| TS0862 - Smart single-door controller                  | ✓         | ✓              | ✓                | ✓                |
| TS0866 - Intelligent four-door controller              |           | ✓              |                  |                  |
| TS0867 - Intelligent four-door controller              |           | ✓              |                  |                  |
| TS0869 - Intelligent four-lift controller              |           | ✓              |                  |                  |
| TS1066 - Network Access Controller                     | ✓         | ✓              |                  |                  |
| TS1067E - Network Access Controller w/ onboard Wiegand | ✓         | ✓              |                  |                  |
| Memory Modules                                         |           |                |                  |                  |
| TS1084 - Memory Module expands to 65,535 users         |           | ✓              |                  |                  |

## Data Gathering Panels and Expanders

|                                                                   | TS0021 | TS1021 |
|-------------------------------------------------------------------|--------|--------|
| TS1020 - Analogue DGP (requires firmware version 5170 or greater) | ✓      | ✓      |
| TS0820 - Challenger V8 DGP                                        | ✓      |        |
| TS0866 - Intelligent four-door controller                         | ✓      |        |
| TS1067 - Network Access Controller with Wiegand                   |        | ✓      |

# Enclosures

|                            | TSX-ENC-S               | TSX-ENC-M | TSX-ENC-L | TS0307               | ENC-LGE              |
|----------------------------|-------------------------|-----------|-----------|----------------------|----------------------|
| Enclosure Features         |                         |           |           |                      |                      |
| Height (mm)                | 620                     | 620       | 795       | 450                  | 593                  |
| Width (mm)                 | 370                     | 560       | 560       | 345                  | 409                  |
| Depth (mm)                 | 135                     | 135       | 135       | 73                   | 120                  |
| Weight (kg)                | 9.5                     | 13.5      | 18        | 12                   |                      |
| Secured Door / Cover       | Two 8mm Square Camlocks |           |           | Security Screw       | Dual Security Screws |
| Smart Power Supply         | No                      | No        | No        | No                   | No                   |
| DIN Rails                  | 2 x 14M                 | 4 x 12M   | 6 x 12M   | TSX-DINRAIL          | No                   |
| Integrated Cabling Conduit | ✓                       | ✓         | ✓         | No                   | No                   |
| Battery size (up to)       | 1 x 18Ah                | 2 x 18AH  | 2 x 18AH  | 1 x 7AH              | 2 x 7AH              |
| Product Compatibility      |                         |           |           |                      |                      |
| Discovery Control Panel    | ✓                       | ✓         | ✓         | Requires TSX-DINRAIL | No                   |
| Discovery 4G Comms Module  | ✓                       | ✓         | ✓         | Requires TSX-DINRAIL | No                   |
| Discovery IO Module        | ✓                       | ✓         | ✓         | Requires TSX-DINRAIL | No                   |
| 'A' Size Devices           | Requires TSX-DINCLIP    |           |           | ✓                    | ✓                    |
| 'B' Size Devices           | Requires TSX-DINCLIP    |           |           | ✓                    | ✓                    |
| 'BB' Size Devices          | Requires TSX-DINCLIP    |           |           | ✓                    | ✓                    |
| 'C' Size Devices           | No                      | No        | No        | ✓                    | ✓                    |
| 'D' Size Devices           | No                      | No        | No        | ✓                    | ✓                    |
| 'E' Size Devices           | No                      | No        | No        | Requires TS1066P     | ✓                    |
| 'F' Size Devices           | Requires TSX-DINCLIP    |           |           | Requires TS1066P     | ✓                    |

## Challenger PCB Size Guide

### 'A' Size Devices

|                  |        |
|------------------|--------|
| Challenger10 DGP | TS1020 |
|------------------|--------|

### 'B' Size Devices

|                              |        |
|------------------------------|--------|
| 4 Input DGP                  | TS0827 |
| 4 Relay Board                | TS0840 |
| 16 Open Collector Board      | TS0842 |
| Single Door Controller       | TS0862 |
| LAN Isolation Board          | TS0893 |
| Fibre to LAN Isolation Board | TS0896 |
| 8 Input Expander             | TS1021 |
| Power Distribution Board     | TS1044 |

### 'BB' Size Devices

|                           |        |
|---------------------------|--------|
| Challenger IP LAN Adaptor | TS0098 |
| 8 Relay Board             | TS1041 |

### 'C' Size Devices

|                              |           |
|------------------------------|-----------|
| Challenger10 Control Panel   | TS1016    |
| ChallengerPlus Control Panel | TS-CHPLUS |

### 'D' Size Devices

|                                  |         |
|----------------------------------|---------|
| Intelligent Four-Door Controller | TS0867  |
| Intelligent Four-Lift Controller | TS0869  |
| NAC with onboard Wiegand         | TS1067E |

### 'E' Size Devices

|                           |        |
|---------------------------|--------|
| Network Access Controller | TS1066 |
|---------------------------|--------|

### 'F' Size Devices

|                        |        |
|------------------------|--------|
| Dual Wiegand Interface | TS1061 |
|------------------------|--------|

# Software



# Software

|                                               | CTPlus          | WMS Pro | Forcefield  |
|-----------------------------------------------|-----------------|---------|-------------|
| Challenger panel support                      |                 |         |             |
| Discovery                                     | ✓               | ✓       |             |
| ChallengerPlus                                | ✓               | ✓       | ✓           |
| Challenger10                                  | ✓               |         | ✓           |
| ChallengerLEPlus                              | ✓               | ✓       | ✓           |
| Network Access Controller                     | ✓               | ✓       | ✓           |
| Panel configuration upload/download           | ✓               | ✓       | ✓           |
| Panel user management                         | ✓               | ✓       | Download    |
| Panel user upload                             | ✓               | ✓       |             |
| UltraSync connection                          | ✓               |         |             |
| UDP/IP connection                             | ✓               |         | ✓           |
| TCP/IP connection                             |                 | ✓       | ✓           |
| Dialler connection                            | ✓               |         | ✓           |
| 4G Communication Module configuration         | ✓               |         | ✓           |
| Communicate via 4G Communication Module       |                 | ✓       | ✓           |
| C-Bus configuration                           | ✓               |         | ✓           |
| C-Bus control                                 | ✓               | ✓       |             |
| USB connection                                | ✓               |         |             |
| Panel time synchronisation                    | ✓               | ✓       | ✓           |
| Firmware update utility                       | ✓               |         |             |
| Challenger firmware feature support (minimum) | V10-06          | V10-07  | V10-02      |
| OS/Database support                           |                 |         |             |
| Windows Server 2025                           |                 | ✓       |             |
| Windows Server 2022                           |                 | ✓       |             |
| Windows Server 2019                           |                 | ✓       |             |
| Windows Server 2016                           |                 | ✓       |             |
| Windows 11                                    | ✓               | ✓       | Client only |
| Windows 10                                    | ✓               | ✓       | Client only |
| QNX4                                          |                 |         | Server only |
| Database                                      | MS SQL Local DB | MS SQL  | RAIMA       |
| ODBC compatible database                      | ✓               | ✓       |             |
| Supported in ESXi environment                 |                 |         | ✓           |
| System Management                             |                 |         |             |
| Alarm management                              | ✓               | ✓       | ✓           |
| Graphic maps                                  |                 | ✓       | ✓           |
| Multi-client                                  |                 | ✓       | ✓           |
| Multi-tenancy                                 |                 | ✓       | ✓           |
| Advanced operator permissions                 | ✓               | ✓       | ✓           |
| Software automations                          |                 | ✓       | ✓           |
| Off-site redundancy                           |                 |         | ✓           |
| Database backup                               | ✓               | Manual  | ✓           |
| Alarm management                              |                 |         |             |
| Alarm priorities                              |                 | 99      | 9           |
| Predefined alarm responses                    |                 | ✓       | ✓           |
| Alarm follow up                               | ✓               | ✓       | ✓           |
| Email notification                            |                 | ✓       | ✓           |
| Alarm override screen                         |                 | ✓       | ✓           |
| Watchhouse mode                               |                 |         | ✓           |
| Customisable Alarm event text                 |                 | ✓       | ✓           |

# Software cont...

|                                   | CTPlus        | WMS Pro   | Forcefield |
|-----------------------------------|---------------|-----------|------------|
| Interface options                 |               |           |            |
| Client interface                  | Windows       | Web       | Windows    |
| Multi-monitor support             | ✓             | ✓         |            |
| Customisable UI style             |               | ✓         |            |
| Access control                    |               |           |            |
| Swipe and show (door monitor)     |               | API       | ✓          |
| Guard tours                       |               |           | ✓          |
| Door override                     |               |           | ✓          |
| User management                   |               |           |            |
| Customisable user maintenance     |               | ✓         | ✓          |
| Smart card programmer integration | ✓             | ✓         | ✓          |
| Multi-controller access rights    |               | UAGs      | Profiles   |
| Photo ID                          |               | ✓         | ✓          |
| Maximum users                     | 65,535        | Unlimited | 1,000,000  |
| User import (Automatic / Manual)  |               | API       | ✓          |
| User export (Automatic / Manual)  |               | API       | ✓          |
| Reporting                         |               |           |            |
| Automated reports                 |               | ✓         | ✓          |
| Custom history report             | ✓             | ✓         |            |
| Report templates                  |               | ✓         | Partial    |
| Time and attendance               |               |           | ✓          |
| Features                          |               |           |            |
| Bulk card creation                | ✓             | ✓         | ✓          |
| Bulk card edit                    | ✓             | API       | ✓          |
| Bulk person edit                  | ✓             | API       | ✓          |
| Bulk device edit (inputs etc.)    | ✓             | ✓         |            |
| Scalability                       |               |           |            |
| Clients                           |               | 300       | 200        |
| Maximum devices                   |               |           |            |
| - Maximum panels                  | 16 (active)   | 600       | 2,560      |
| - Maximum DVRs                    | 1 (per panel) |           | 999        |
| Events per second                 |               | 50+       | 20         |
| Maximum database size             | 10 GB         | Unlimited | 2 GB       |
| Third Party Integration           |               |           |            |
| 3rd party person management       |               | REST API  | Protocol   |
| 3rd party status and control      |               | REST API  |            |
| 3rd party alarm interface         |               |           | ✓          |
| 3rd party video support           |               |           | ✓          |
| Event output                      |               | API       | ✓          |
| ASCII data output (IP or serial)  |               |           | ✓          |
| TruVision video                   | ✓             |           | ✓          |
| Genetec video                     |               |           | ✓          |
| Avigilon video                    |               |           | ✓          |

# Software cont...


|                                                                                                                  | CTPlus | WMS Pro | Forcefield |
|------------------------------------------------------------------------------------------------------------------|--------|---------|------------|
| Third Party Integration cont.                                                                                    |        |         |            |
| Commend IP intercom                                                                                              |        |         | ✓          |
| Jacques 550 intercom                                                                                             |        |         | ✓          |
| Teleste VMX IP video system                                                                                      |        |         | ✓          |
| DVTel alarm interface                                                                                            |        |         | ✓          |
| Ascom Nira duress                                                                                                |        |         | ✓          |
| KONE destination lift interface                                                                                  |        |         | ✓          |
| Otis destination lift interface                                                                                  |        |         | ✓          |
| Visitor Management                                                                                               |        | API     |            |
| Video integration (Aritech) - please refer to individual product interface datasheets for detailed functionality |        |         |            |
| View live and recorded footage                                                                                   | ✓      |         | ✓          |
| Access and alarm event tagging                                                                                   |        |         | ✓          |
| PTZ control                                                                                                      |        |         | ✓          |
| Megapixel IP camera support                                                                                      | ✓      |         | ✓          |
| Multiview support                                                                                                | ✓      |         | ✓          |
| Export recorded footage                                                                                          |        |         | ✓          |
| Save snapshots of live or recorded footage                                                                       |        |         | ✓          |
| High or low bandwidth video streams                                                                              | ✓      |         | ✓          |
| Pop up video on event                                                                                            |        |         | ✓          |
| Export video clip from client                                                                                    |        |         | ✓          |
| Full video device configuration                                                                                  |        |         | ✓          |
| DVR time synchronisation                                                                                         |        |         | ✓          |
| Custom camera layouts                                                                                            |        |         | ✓          |
| Receive video system alarms                                                                                      |        |         | ✓          |
| Control playback direction and speed                                                                             | ✓      |         | ✓          |
| Camera import function                                                                                           | ✓      |         | ✓          |

## WMS Pro API Support

|                        | WMS Pro | WMS Pro | WMS Pro | WMS Pro |
|------------------------|---------|---------|---------|---------|
|                        | V3.0    | V3.1    | V3.2    | V3.3    |
| CTPlus 3.5             | ✓       | ✓       | ✓       | ✓       |
| CTPlus 3.6             | ✓       | ✓       | ✓       | ✓       |
| CTPlus 3.7             | ✓       | ✓       | ✓       | ✓       |
| SCPIInterface v1.0.0.4 | ✓       | ✓       | ✓       | ✓       |
| Cardholders API        | API v1  | API v1  | API v1  | API v1  |
| 3rd Party API          | API v2  | API v2  | API v2  | API v2  |


# Tecom Software

## WMS Pro Software

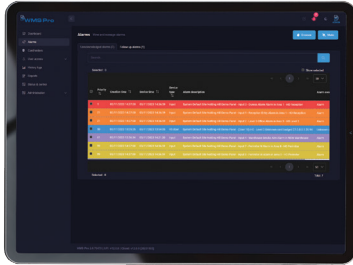

WMS Pro is available to trained installers and is available through an authorised Tecom distributor. To locate an authorised Tecom Distributor, visit our [website](#). A copy of the software may be downloaded at any time from our [online library](#), and includes a 60-day free trial. Installers wanting to purchase WMS Pro must complete relevant training prior to registering the product, which may be completed [online](#).

## Download TecomPlus Mobile App today for your ChallengerPlus control panel

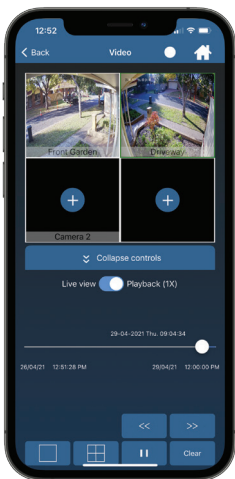

TecomPlus Mobile takes advantage of the latest technology, allowing you to connect your panel over the UltraSync network. Perform the most important keypad functions on your favourite digital device, from any location, at any time.

The simple but powerful interface allows you to open doors, arm/disarm areas, isolate inputs or control lighting. You can also view panel history and outstanding alarms on all of your popular digital devices.



## Downloads and Resource Documents

The Tecom portfolio provides a number of options to ensure your security needs are met. The resource library on our [website](#) contains all the information you'll need to make sure you are getting the best from your Tecom solution.

Don't forget to visit our [website](#) to download the latest software and firmware versions.

## About Aritech

Aritech provides leading security and life-safety solutions for both commercial and residential applications covering intrusion, video, transmission and access. Offering some of the most-trusted product names in the industry, and backed by ongoing partner services and support, Aritech helps customers secure and protect what matters most.

For more information visit our [website](#).  
Follow us on LinkedIn #Aritech Australia.



Specifications subject to change without notice.

©2026 Aritech. All rights reserved.  
All trademarks are the property of their respective owners.

TecomCompatibilityMatrix\_SEPT2026