


ATS1810

Relay board, 4-way

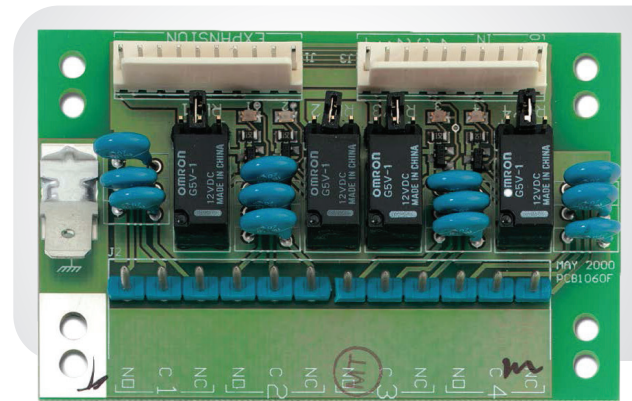

OVERVIEW

The four way relay card provides four single pole double throw relays with connection terminals to the common (C), normally open (NO), and normally closed (NC) contacts.

The relay contacts are rated at 1 A @ 0 to 30 VDC; reducing to 300 mA @ 48 VDC. If fitted to a DGP, two relay modules can be connected together in daisy-chain fashion to provide up to eight relays on ATS120xE series. When fitted to the control panel or four to eight door/lift expander, only one relay module is allowed.

An LED is provided for every relay to indicate activation.

FEATURES

- Expand panel or expander with four SPDT relay outputs
- Max number depends on panel/expander
- Plug-in using flat-cable (included)

ATS1810

Relay board, 4-way

National Sales Enquiries
Level 4.01, 2 Ferntree Place
Notting Hill, Victoria 3168
Phone: 1300 361 479
Outside Australia: +61 401 777 572
www.aritech.com.au

SPECIFICATIONS

General	
Expander type	Output expander
Product line	Axon
Connection type	Pre made connection lead
Max. distance from panel	Located in Panel or DGP/Expander housing
Max. per panel	Depending on panel/expander
Outputs	
Total	4
Onboard	4
Type of outputs	Relays
Relays	SPDT
Electrical	
Operating voltage	10.5 to 13.8 VDCI
Current consumption	110 mA
Physical	
Physical dimensions	80 mm x 52 mm
Environmental	
Operating temperature	-10 to +55°C
Relative humidity	93% noncondensing
Environment	Indoor
Regulatory	
Compliance	CE, RCM